


NO.	NAME OF PARTS	MATERIAL	QTY	REMARKS	NO.	NAME OF PARTS	MATERIAL	QTY	REMARKS	
1	VALVE BODY	ホンタイ	SCS 13	1	5	BOLT	ボルト	SUS 304	4	65mm
2	COVER	カバー	SCS 13	1					6	80, 100mm
3	NET	ネット	SUS 316	1					8	125, 150mm
4	GASKET	ガスケット	PTFE	1	(W/loading material)	6	DRAIN PLUG	ドレンプラグ	SUS 304	1
						7				

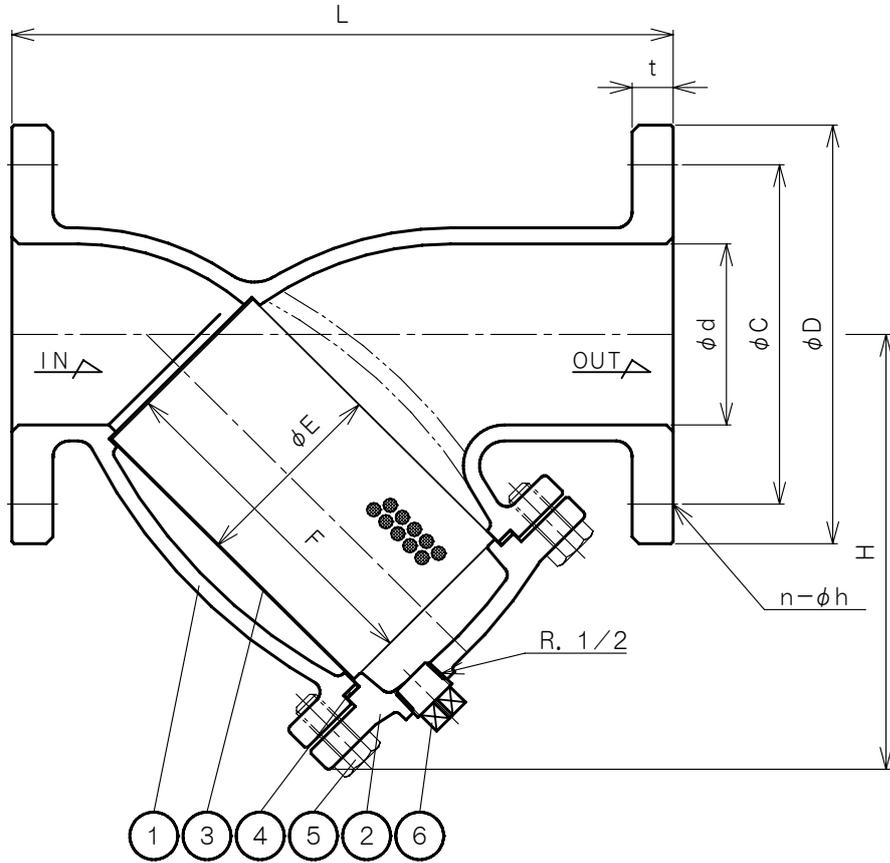

DIMENSIONS (mm)

FLANGE CODE: JIS 10K FF

メッシュ (MESH)

SIZE	d	L	D	C	t	n	h	H	E	F
65	65	270	175	140	18	4	19	162	78	120
80	80	290	185	150	18	8	19	195	88	150
100	100	350	210	175	18	8	19	228	110	180
125	125	390	250	210	20	8	23	260	140	200
150	150	440	280	240	22	8	23	310	170	240

製品記号 CODE	メッシュ (MESH)	指定 (REQUEST)
KY8-D	40	
KY8-D2	60	
KY8-D	80	
KY8-D	100	
KY8-D		

仕様

SPECIFICATIONS

適用流体 APPLICABLE FLUID	蒸気・気体・液体 STEAM, GASES AND LIQUIDS
適用圧力 APPLICABLE PRESSURE	最高. 1.0 MPa MAX.
流体温度 APPLICABLE TEMPERATURE	最高. 200°C MAX.

KY-8 TYPE
STRAINER
KY-8 型
ストレーナ

APPROVED 承認	CHECK 検	DRAWING 製図
K. Nakamura	S. Akiyama	K. Hamada
DATE 日付	2022-7-25	
NOTE		

APPROVED DWG. NO.
出図番号
DWG. No. 原図番号
KY8-52E-P
SER. No. 管理番号

