


NO.	NAME OF PARTS	MATERIAL	QTY	REMARKS	NO.	NAME OF PARTS	MATERIAL	QTY	REMARKS
1	VALVE BODY	ホンタイ	SCS 13	1		5			
2	CAP	キャップ	SCS 13	1		6			
3	NET	ネット	SUS 316	1		7			
4	GASKET	ガスケット	PTFE	1	(W/loading material)	8			
						9			

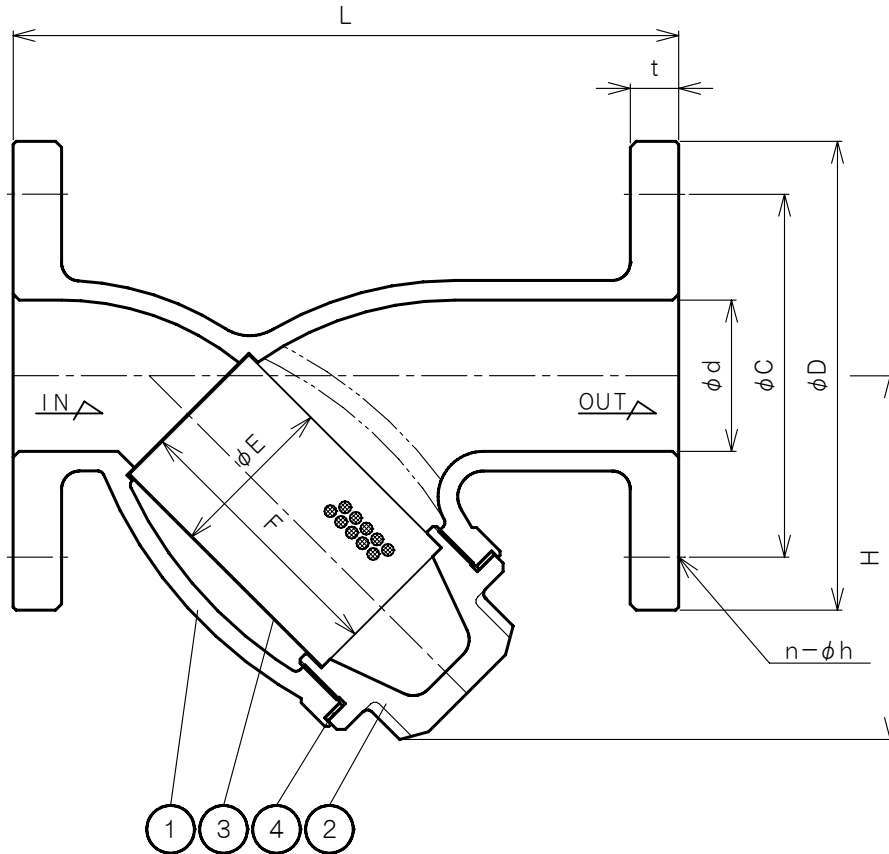

DIMENSIONS (mm)

FLANGE CODE: JIS 10K FF


メッシュ (MESH)

SIZE	d	L	D	C	t	n	h	H	E	F
15	15	120	95	70	12	4	15	57	18	45
20	20	130	100	75	14	4	15	65	23	50
25	25	150	125	90	14	4	19	76	30	60
32	32	170	135	100	16	4	19	92	39	70
40	40	190	140	105	16	4	19	105	44	75
50	50	220	155	120	16	4	19	122	56	90

製品記号 CODE	メッシュ (MESH)	指定 (REQUEST)
KY8-D	40	
KY8-D2	60	
KY8-D	80	
KY8-D	100	
KY8-D		

仕様  
SPECIFICATIONS

適用流体 APPLICABLE FLUID	蒸気・気体・液体 STEAM, GASES AND LIQUIDS
適用圧力 APPLICABLE PRESSURE	最高. 1.0 MPa MAX.
流体温度 APPLICABLE TEMPERATURE	最高. 200°C MAX.

KY-8 TYPE STRAINER KY-8 型 ストレーナ	APPROVED 承認	CHECK 検	DRAWING 製図
	K. Nakamura	S. Akiyama	K. Hamada
	DATE 日付	2022-7-25	
	NOTE		
APPROVED DWG. NO. 出図番号			
DWG. No. 原図番号			
KY8-51E-P			
SER. No. 管理番号			
	 <b>VENN CO., LTD.</b> 株式会社		